

SWIMMING POOL WATERPROOFING SOLUTIONS

SOPREMAPOOL



CONTENTS

SOPREMA	3
PRESENTATION	4
SOPREMAPOOL 3D	6
SOPREMAPOOL DESIGN	8
SOPREMAPOOL PREMIUM	10
SOPREMAPOOL ONE	12
COMPLEMENTS & ACCESSORIES	14





An independent family group since 1908, **SOPREMA** has established itself as one of the world's leading waterproofing companies and also as a specialist in roofing, sound sublayers and insulation. Over the years, the **SOPREMA** Group has grown and diversified around the world by integrating complementary activities into its original business: waterproofing.

With a workforce of more than 9,200 people and a turnover of more than €3 billion, **SOPREMA** has a global commercial industrial footprint with 81 factories, more than 100 operating subsidiaries and a presence in 90 countries, as well as 17 highly focused sustainable development R&D centres and 22 training centres in eight countries.

As a result of a close collaboration between our marketing and R&D departments, the **SOPREMA** product range is innovative and fully in line with market requirements and current standards. **SOPREMA**'s success is built on a basic principle: to focus on the idea.

SOPREMA's products and services aim to meet the most demanding needs of building professionals in terms of waterproofing reinforced PVC membranes for swimming pools, waterproofing roof terraces, civil engineering works, insulation, roofing, natural lighting, and green and photovoltaic roofs.

SOPREMA offers original, high-performance and high-tech solutions that address all building problems. Constantly optimised by our research and development services as part of our eco-design approach, **SOPREMA** systems today deliver exceptional performance in terms of strength, reliability and longevity.

At **SOPREMA** we are fully committed to sustainability and we work towards a sustainable construction model focusing on two main points: manufacturing energy efficient products and adopting a closed and circular life cycle construction model that allows the reuse of construction waste. A renewed vision of construction with a more environmentally responsible and friendly approach is needed.

All **SOPREMA** plants are ISO 9001 certified. Some are also ISO 14001, ISO 16001 and ISO 18001 certified.

SOPREMA, a world leader in waterproofing solutions, offers a wide range of reinforced synthetic membranes and other complementary products for the installation and maintenance of swimming pools under the name **SOPREMAPOOL**.







- Optimal welding
- UV resistance
- Resistance against microorganisms with "Bio Shield" treatment
- Impact resistance
- High mechanical resistance
- Resistance against standard chemicals for water treatment in swimming pools covered with a PVC liner


REINFORCED MEMBRANES

4-LAYER MEMBRANES

Reinforced synthetic membranes manufactured by induction with high quality raw materials (resins, plasticisers, stabilisers and pigments).

Composed of four layers with different and complementary formulations, introducing a polyester reinforcement between the second and third layers.

This reinforcement provides the membrane with great tensile strength and high dimensional stability

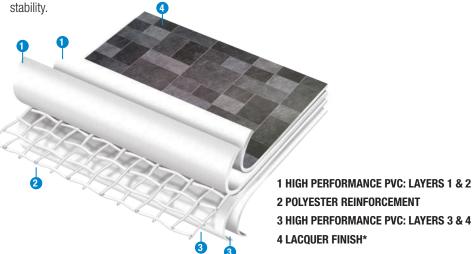

* EXCEPT SOPREMAPOOL ONE





NEW FORMULATION

Our laboratories have improved their formulation by integrating an exclusive varnish in the four layers for the entire SOPREMAPOOL range, thus achieving greater durability and resistance to:

- Colour fading
- Chlorine
- Stains
- Microorganisms

« BIO SHIELD » TREATMENT

Its formulation with "BIO SHIELD" treatment guarantees total resistance to the formation of microorganisms and prevents any molecular change.

WARRANTY







SOPREMAPOOL 3D + DESIGN + PREMIUM



SOPREMAPOOL ONE

* Stains caused by bacteria.

SENSITIVE BALI



- Attractive and stylish
- Easy and quick installation
- Sensory experience
- Exclusive varnish integrated in all four layers
- Varnish coating
- Exclusive designs
- Multiple designs

WARRANTY - 3D

- 12 years for waterproofing
- · 3 years for stains caused by bacteria

SOPREMAPOOL 3D

180/100 REINFORCED MEMBRANE

PVC reinforced membrane of 1.8 mm with exclusive varnish integrated in all four layers and varnished coating for superior protection against UV rays, microorganisms and chlorine.

The 3D range replicates the feel and look of mosaics and natural materials.



The stylish embossed motifs add to the characteristic advantages of reinforced PVC lining: simple and quick installation and high protective and waterproofing capacity.

SOPREMAPOOL 3D has been tested for slip prevention according to the European standard EN 13451-1 (according to annex B of EN 15836-2) and DIN 51097 (1992).

DIMENSIONS

Roll of 1.65 x 25 m.





SENSITIVE GREY



SENSITIVE SAND 156988/SSSA



SENSITIVE WHITE 156988/SSHB



SENSITIVE GREY 156988/SSGM



SENSITIVE BLACK 156988/SSNB



SENSITIVE BALI SAND 156988/SSBS




SENSITIVE BALI 156988/SSBA



SENSITIVE BALI XL 156988/SSXL



SENSITIVE WOOD 156988/SSWO

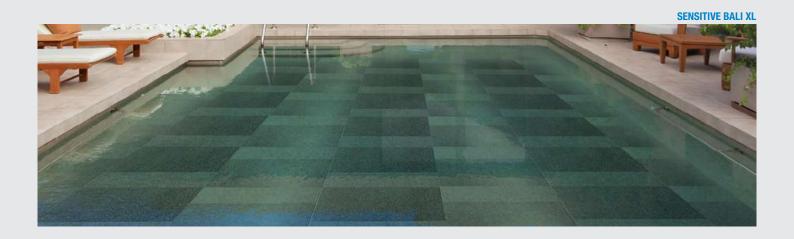



BALI SAND



- Flexible
- Smooth
- Exclusive varnish integrated in all four layers
- Varnish coating
- Exclusive designs
- Multiple designs

SOPREMAPOOL DESIGN

150/100 REINFORCED MEMBRANE

PVC reinforced membrane of 1.5 mm with exclusive varnish integrated in all four layers and varnished coating for superior protection against UV, microorganisms and chlorine.

DIMENSIONS

Roll of 1.65 x 25 m.

GRIP (non-slip version)

All designs* are available in the non-slip version.

DIMENSIONS

Roll of 1.65 x 10 m.



- 12 years for waterproofing
- 3 years for stains caused by bacteria

* Except Sky Blue and Pearl Black models.





MARBELLA BLUE



MARBELLA BLUE 156975/MMB



MARBELLA GREY 156975/MMG



MARBELLA BLACK 156975/MMBK



MOSAIC BLUE 156975/MNB



BALI SAND 156975/SDBA



BALI 156975/BALI



BALI XL 156975/XL



W00D 156975/W0



SKY BLUE 156975/SB



PEARL BLACK 156975/PB







MEDIUM GREY



Flexible

- 10

- Smooth
- Exclusive varnish integrated in all four layers
- Varnish coating
- Intense and multiple colours

SOPREMAPOOL PREMIUM

150/100 REINFORCED MEMBRANE

PVC reinforced membrane of 1.5 mm with exclusive varnish integrated in all four layers and varnished coating for superior protection against UV, microorganisms and chlorine.

DIMENSIONS

Roll of 1.65 x 25 m.

GRIP (non-slip version)

All colours are available in the non-slip version.

DIMENSIONS

Roll of 1.65 x 10 m.




- 12 years for waterproofing
- $\bullet \textbf{3 years for stains caused by bacteria}$



SAND





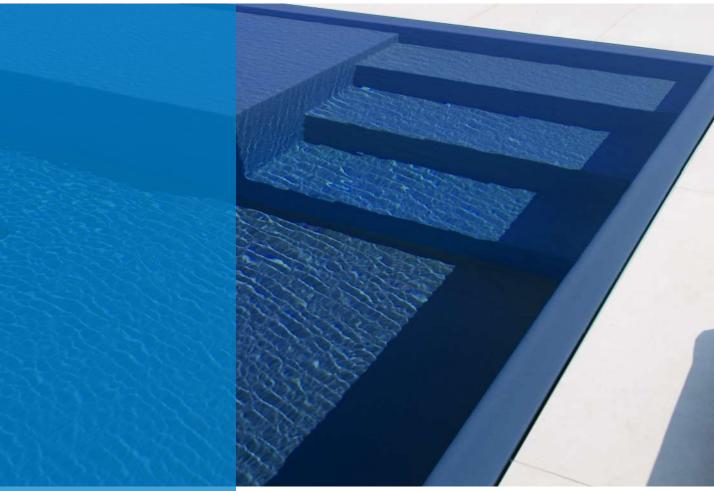

SAPPHIRE BLUE



- Flexible
- Smooth
- Exclusive varnish integrated in all four layers
- Intense and multiple colours

SOPREMAPOOL ONE

150/100 REINFORCED MEMBRANE

PVC reinforced membrane of 1.5 mm with exclusive varnish integrated in all four layers and standard protection against UV and microorganisms.

DIMENSIONS

Roll of 1.65 x 25 m.

GRIP (non-slip version)

All colours are available in the non-slip version.

DIMENSIONS

Roll of 1.65 x 10 m.



• 10 years for waterproofing

— 12







COMPLEMENTS & ACCESSORIES

SOPREM STANDARD CLIQUID	156992	PVC LIQUID Liquid PVC for liner covering in-ground pools. Colours: Transparent, Light Blue, Azure Blue, Sapphire Blue, Dark Blue, Caribbean Green, Natural Green, Wild Musk, Sand, White, Light Grey, Medium Grey, Basalt Grey, Black, Marbella, Bali & Bali XL, Bali Sand, Wood, Sensitive Sand, Sensitive White, Sensitive Grey and Sensitive Black. Content: 1 L.
Wood Rend	152890	ALSAN BOND POOL SP Alsan Bond POOL SP is a fast-drying sprayable solvent-based adhesive for bonding the geotextile to the pool support prior to liner installation. It is suitable for indoor and outdoor applications. Content: 500 ml. Box with 12 units.
Aut Series	159005	ALSAN BOND POOL 410 Cold contact glue for single and double gluing the reinforced membrane to the pool structure at specific points. Content: 5 L.
	51344	FLAT PVC METAL STRIP Profile to weld the reinforced membrane on the vertical walls. Content: Pack of 10 units. Dimensions: 2 m x 0.05 m
	159821	ANGLE PVC METAL STRIP Profile to fix the reinforced membrane in new-build or refurbished pools where there is a raised coping. Content: Pack of 10 units. Dimensions: 2 m x 0.05 m x 0.05 m
	159761	HUNG ALUMINIUM PROFILE Profile to anchor the reinforced membrane, especially suitable for new-build pools. Content: Pack of 10 units. Dimensions: 2 m x 0.05 m
	158498	PVC CORD Cord to weld the edge of the reinforced membrane to attach it to the profile. Content: Pack of 5 units Dimensions: 25 m x 9 mm (every unit).

- 14

	107237	PVC BORDER PVC strip to close the anchoring profile. Colours: White, Medium Grey, Dark Grey, Light Blue and Sand. Content: 30 m.
	159762	EXPANSION NAILS Expansion nails for fixing. Content: 100 Units Dimensions: 4.8 Ø x 25 mm
	159156	LIQUID PVC APPLICATOR Applicator for the liquid PVC.
Sanitary Name of the Control of the Control Name	151757	DISINFECTANT FOR STRUCTURE Product to clean and disinfect the pool structure. Procedure prior to the installation of the reinforced membrane that prevents the proliferation of microorganisms between the soil and the membrane. Content: 250 ml. 2.5% solution.
	157622	WELDING STRIP Welding strip to install Sopremapool 3D membranes (edge-to-edge installation). Dimensions: 25 m x 0.15 m
	220276	PVC MARKING STRIP Strip for the separation of the swimming lanes. Dimensions: 25 m x 0.25 m
LEISTER	-	LEISTER POOL KIT Complete kit of tools for the installation of synthetic membranes in swimming pools: Leister Triac AT 230 V / 1600 W; 40 mm, 20 mm and 5 mm flat nozzle for hot air torch; quick flat band nozzle 8x2 mm; 40 mm silicone pressure roller; 8 mm brass pressure castor; synthetic diaphragm welding tip; angled floor chisel 28 cm for PVC membranes; anti-cut gloves level 5 Taeki size 10; cutter blades 18 mm metal body; cutter retractable blade metal body; Spid convex brush brass-plated steel; tape measure 5 m x 25 mm; bi-material PH 1x100 screwdriver; transport package <30 kg.



SOPREMA Group at your service

SOPREMAPOOL Let's go swimming!



www.sopremapool.com sopremapool@soprema.com

Download the **SOPREMA**POOL app!







